


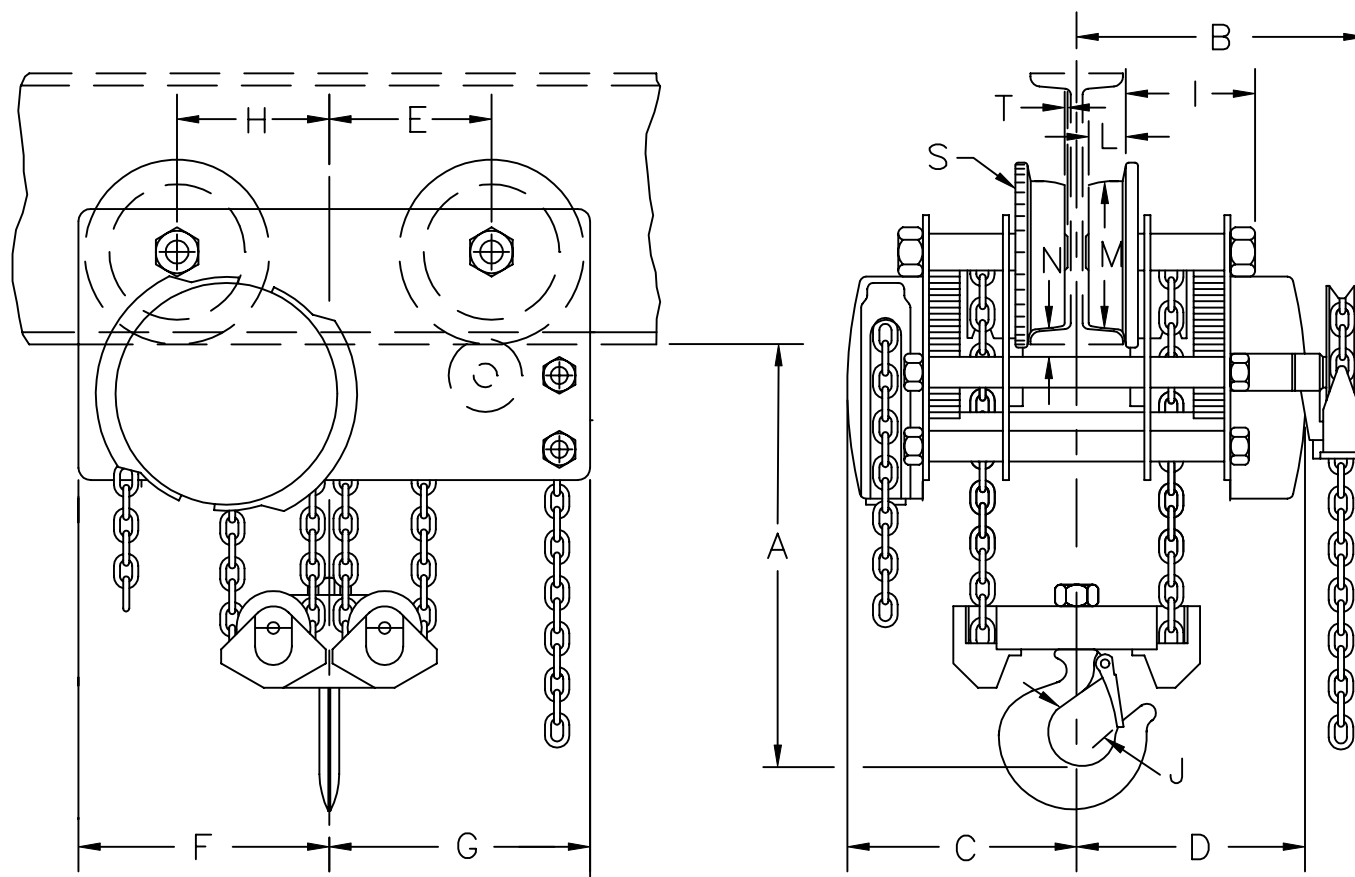

|    |   |          |
|----|---|----------|
| ** | A | 17 1/4"  |
|    | B | 19 1/4"  |
|    | C | 15 3/16" |
|    | D | 15 3/16" |
|    | E | 12 1/8"  |
|    | F | 19 1/4"  |
|    | G | 19"      |
|    | H | 12 3/8"  |
|    | I | 10 1/4"  |
|    | J | 3 5/8"   |
|    | L | 2"       |
| #* | M | 11 3/4"  |
|    | N | 1 3/16"  |
| ^  | S | 13 1/2"  |
|    | T | 7/16"    |

**FOR MORE INFO CONTACT:**  
**American Crane & Equipment Corp.**  
**Authorized Distributor**  
**Tel: 877-503-2972**  
**Fax: 484-945-0430**  
**Email: sales@americancrane.com**  
**www.americancrane.com**

\* TO WHEEL RUNNING SURFACE OF BEAM

\*\* "B" APPLIES TO GEARED UNITS ONLY - FOR PLAIN UNITS DIM. "C" & "D" ARE MAX. 1/2 WIDTH

# TO UNDER BEAM ROLLER - (CLOSEST POINT OF CONTACT)

^ FROM THE FACE OF WHEEL TO END OF AXLE

CUSTOMER MUST TAKE INTO CONSIDERATION FLANGE WIDTH AND THICKNESS OF BEAM

DIM. SHOWN ARE CORRECT FOR ANY "S" OR "W" BEAM, (FLAT TREAD WHEELS, NOT SHOWN, ARE SUPPLIED FOR "W" BEAM APPLICATIONS)

20&24 TON LOW HEADROOM HOIST

**CHESTER HOIST**  
 LISBON, OHIO

|                |        |      |         |
|----------------|--------|------|---------|
| DR. RLB        | TR.    | CK.  | AP.     |
| SCALE          | NONE   | DATE | 6-19-00 |
| REF. DWG. NO.  | 20ZLG4 |      |         |
| Dwg. No. CD060 |        |      |         |