


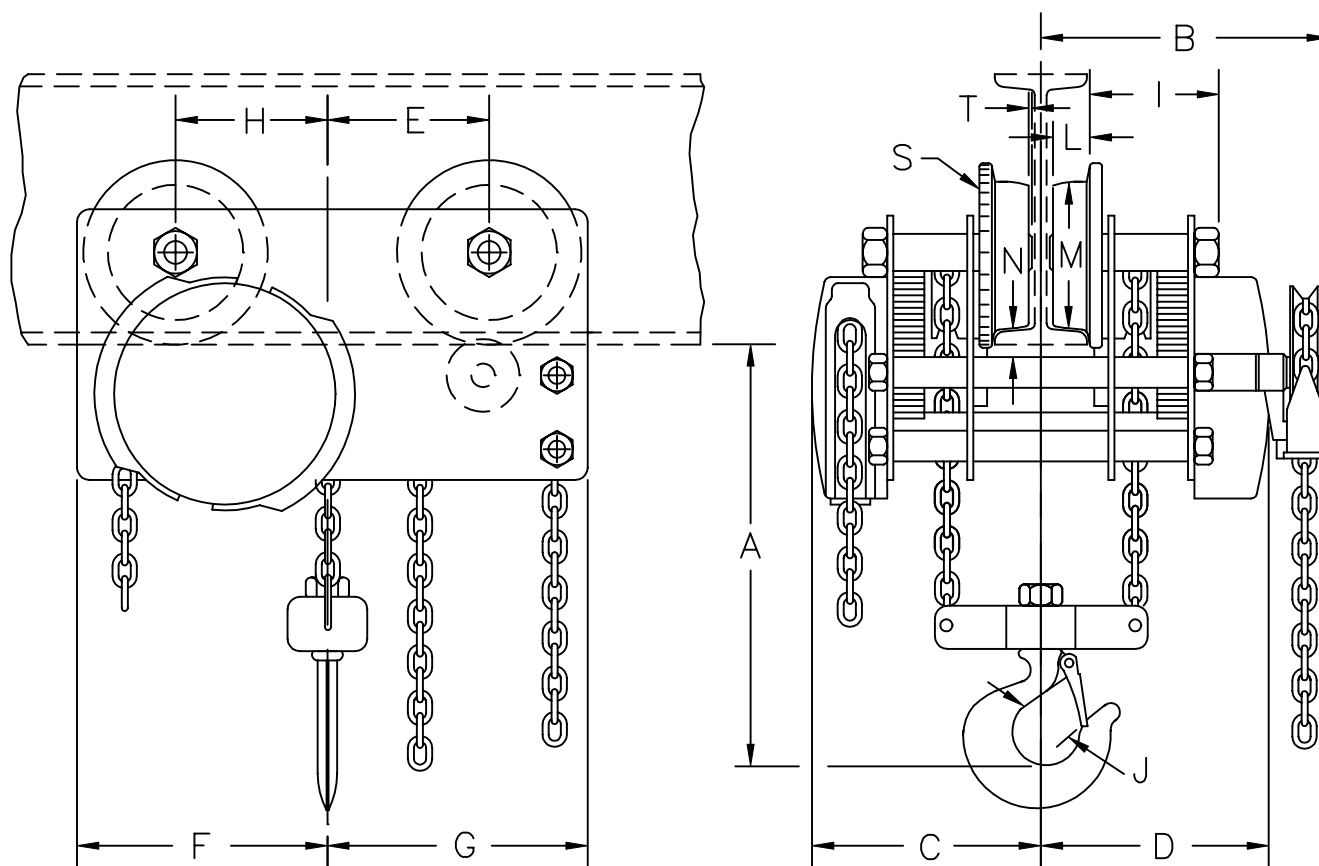

**	A	8 3/4"
**	B	16 1/2"
	C	13 1/8"
	D	13 1/8"
	E	7 3/8"
	F	12"
	G	12"
	H	7 3/8"
	I	7 15/16"
	J	1 11/16"
	L	1 13/32"
#*	M	7 3/16"
#*	N	1"
^	S	9"
	T	0"

* TO WHEEL RUNNING SURFACE OF BEAM

** "B" APPLIES TO GEARED UNITS ONLY - FOR PLAIN UNITS DIM. "C" & "D" ARE MAX. 1/2 WIDTH

TO UNDER BEAM ROLLER - (CLOSEST POINT OF CONTACT)

^ FROM THE FACE OF WHEEL TO END OF AXLE

CUSTOMER MUST TAKE INTO CONSIDERATION FLANGE WIDTH AND THICKNESS OF BEAM

DIM. SHOWN ARE CORRECT FOR ANY "S" OR "W" BEAM, (FLAT TREAD WHEELS, NOT SHOWN, ARE SUPPLIED FOR "W" BEAM APPLICATIONS)

			5&6 TON LOW HEADROOM HOIST	DR. RLB	TR.	CK.	AP.
				SCALE	NONE	DATE 6-19-00	
			CHESTER HOIST LISBON, OHIO	REF. DWG. NO. 5ZLGL1 UPDATED			
				Dwg. No. CD056			
MK.	REVISIONS	CK-DATE					