


Yale · Lift-Tech™

Crane Component - Underhung Motor Driven Crane Bridge Kits

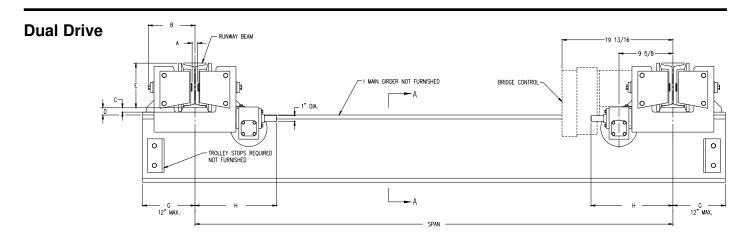

Single Drive

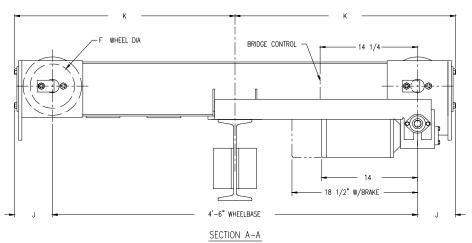

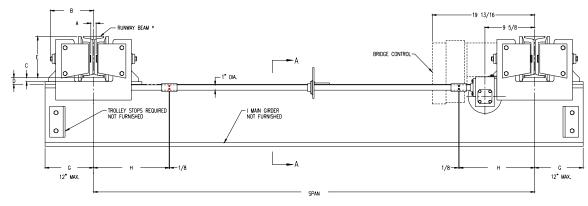

Clearance Dimensions (in.)

	Runway Beam Sizes**															Max.	
Product Code	Rated Capacity (tons)	Max. Span (ft)	Min Beam Width	Min.	Max. Flange Width	Α	В	С	D	E	F Wheel Dia.	G Min.	н	J†	к	Wheel Load Per Pair (lbs)	Approx. Shipping Wt (lbs)
905369	1/4 - 3	36	S6x12.5	3-3/8	5-1/2	1-1/8	7-13/16	15/16	1-7/16	5-1/8	4	8-1/4	14	4	2' - 7"	4240	400
905525	5	36	S8x18.4	4	6-1/4	3/4	8-11/16	13/16	1-5/16	8	6-1/2	9-3/8	14-5/8	5-1/2	2' - 8-5/8"	7520	480

^{**}Runway beam sizes shown indicate range of beams that trucks will fit. For proper runway size, consult qualified engineer or architect. End trucks for wider flange beams or 3-1/4" patented track are available.

Dimensions A, B, C, D and E are based on minimum beam.

[†] Dimension with rubber bumpers: 3 ton catalogs 905369 = 7 3/8 and 5 ton catalogs 905525 = 8-7/8.

^{*} For spans from 36' up to 48' consult factory.