

A 11 1/8"
 B 21 7/8"
 C 6 1/8"
 D 8 5/8"
 E 1 3/8"
 F 4 13/16"
 G 7/8"
 H 1"
 I 2 1/16"
 J 7/8"
 K 4"
 L 2 7/8"
 M 7 1/4"
 N 4 1/4"
 P 4 1/4"
 Q 3"
 R 8 9/16"
 S 5 1/4"
 T 4 7/8"



TREAD WIDTH

FLANGE O.D.

TREAD O.D.

COVER O.D.

(END OF TROLLEY DRIVE
 SHAFT) BELOW BEAM.

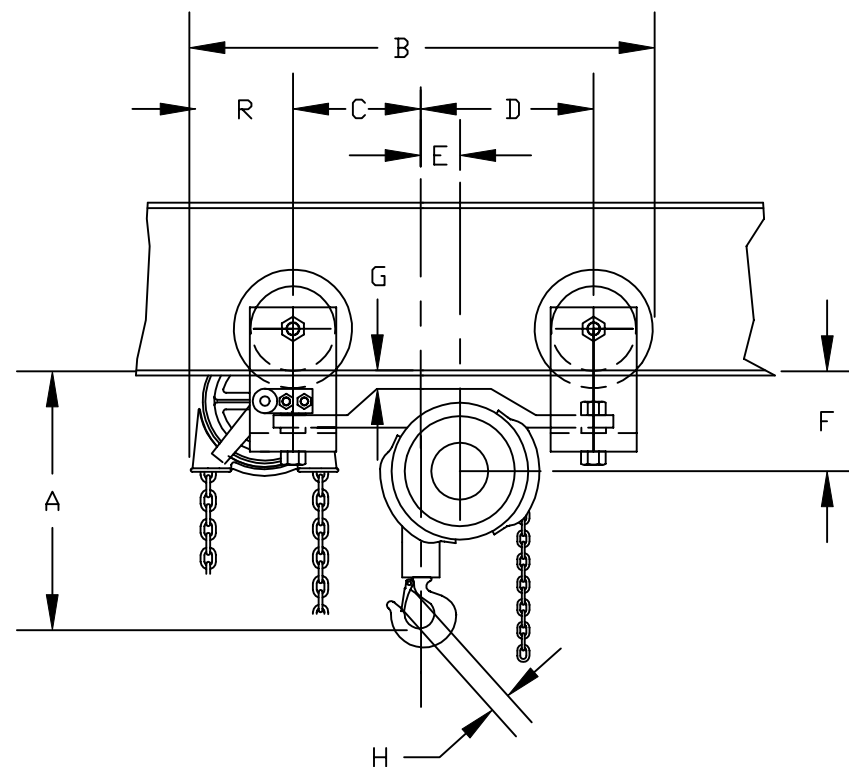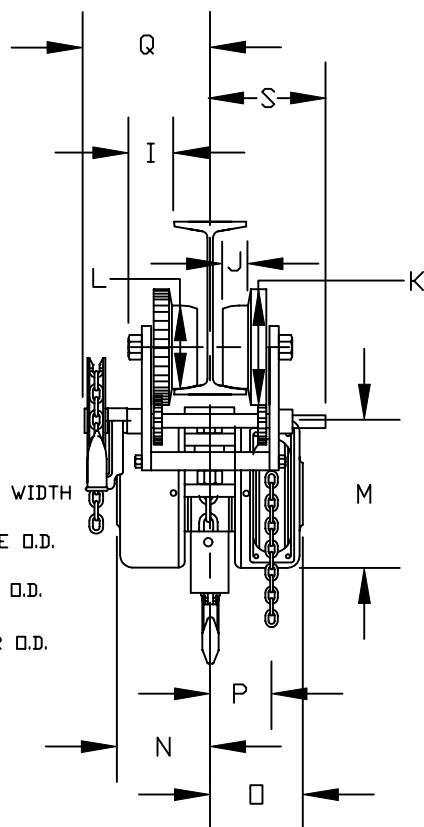

UNIT IS ADJUSTABLE FROM S4"x7.7# THROUGH S10"x25.4# BEAM
 CUSTOMER MUST TAKE INTO CONSIDERATION FLANGE WIDTH AND THICKNESS.
 * DIM. TO WHEEL RUNNING SURFACE

MK.	REVISIONS	CK-DATE

1/4 & 1/2 TON ARMY TYPE GEARED TROLLEY
 HOIST

CHESTER HOIST
 LISBON, OHIO

DR. RLB	TR.	CK.	AP.
SCALE NONE		DATE 6-19-00	
REF. DWG. NO. AGCL30			
Dwg. No. CD038			