

FOR MORE INFO CONTACT: American Crane & Equipment Corp. - Authorized Distributor

Tel: 877-503-2972 Fax: 484-945-0430 Email: sales@americancrane.com Website: www.americancrane.com

* A 13 13/16"

^ B 27 1/4"

C 7 1/2"

D 11"

E 1 3/4"

* F 5 3/4"

* G 3/4"

H 1 1/8"

I 2 3/16"

J 1 7/64" TREAD WIDTH

K 6" FLANGE O.D.

L 4 1/2" TREAD O.D.

M 9 3/4" COVER O.D.

N 5"

□ 5"


P 3 1/4"

^ Q 8 9/16"

R 3"

^ S 4 7/8" (END OF TROLLEY DRIVE SHAFT) BELOW BEAM.

T 24 1/2"

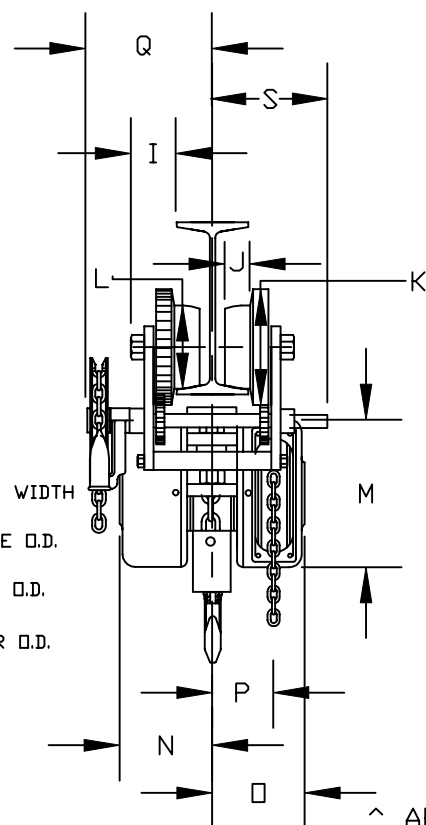

^ APPLIES TO GEARED UNITS ONLY


* DIM. TO WHEEL RUNNING SURFACE

"I" IS THE SAME FOR BOTH SIDES OF THE UNIT

UNIT ADJUSTABLE FROM S6"X12.5# THROUGH S15"X42.9# BEAM

CUSTOMER MUST TAKE INTO CONSIDERATION FLANGE WIDTH AND THICKNESS.

DIM. SHOWN ARE CORRECT FOR ANY "S" OR "W" BEAM...FLAT TREAD WHEELS (NOT SHOWN) ARE SUPPLIED FOR "W" BEAM APPLICATIONS.

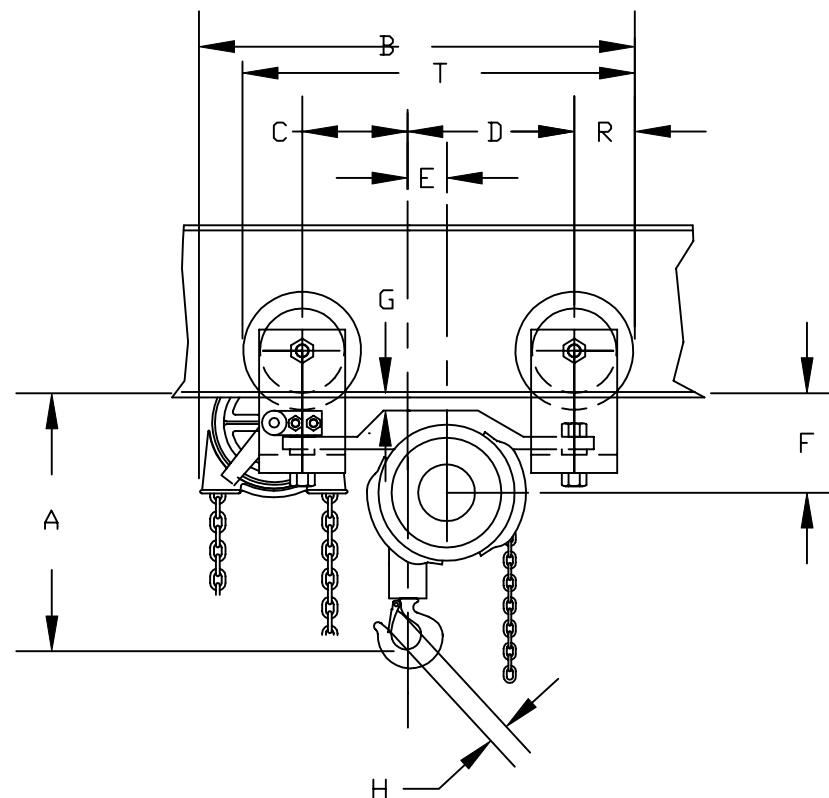

1 1/2 & 2 TON ARMY TYPE PLAIN
AND GEARED TROLLEY HOIST

CHESTER HOIST

LISBON, OHIO

DR. RLB

TR.

CK.

AP.

SCALE NONE

DATE 6-19-00

REF. DWG. NO.

2TAG

Dwg. No. CD042

MK.

REVISIONS

CK-DATE