

FOR MORE INFO CONTACT: American Crane & Equipment Corp. - Authorized Distributor

Tel: 877-503-2972 Fax: 484-945-0430 Email: sales@americancrane.com Website: www.americancrane.com

NO. REQ. 1

* A 19 15/16"

B 16 3/4"

C 8 1/2"

* D 3 1/4" TO CENTER OF
EQUALIZING PIN

* E 8 9/16"

* F 1 7/16"

G 1 11/32"

H 1 11/32"

I 8" WHEEL FLANGE
DIAMETER

J 3/16"

L 2 1/2"

K 6 3/8"

M 8 11/16"



N 11"

O 9 3/4" COVER
O.D.

P 5"

Q 5"

R 3 1/4"

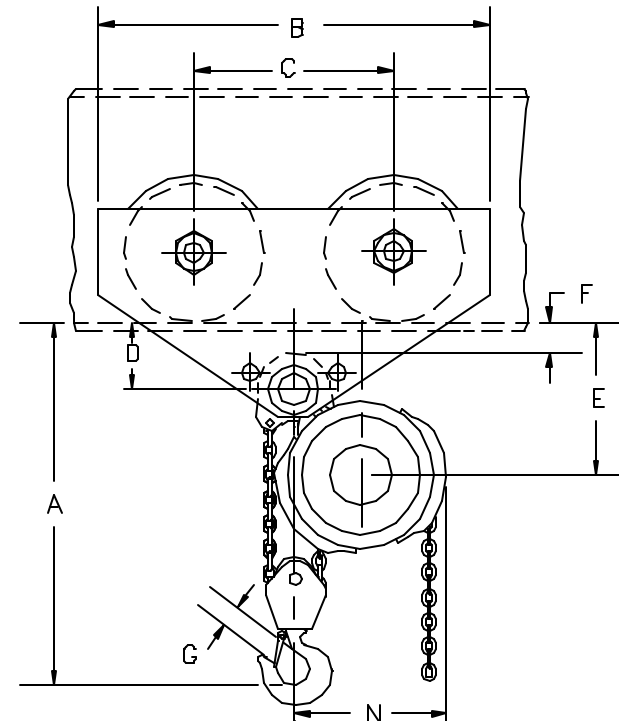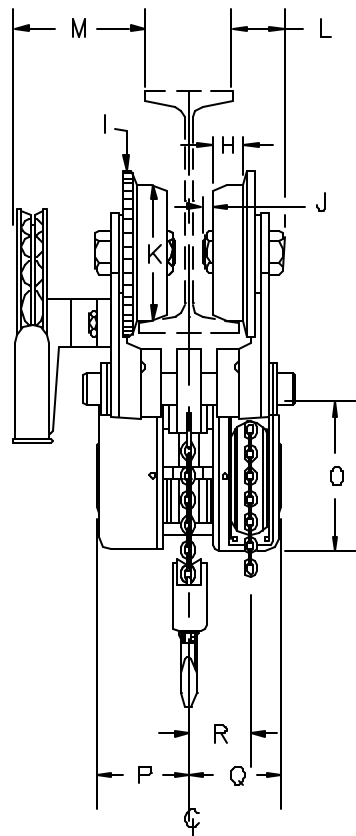

* DIM. ARE TO RUNNING SURFACE OF BEAM FLANGE.
CUSTOMER MUST TAKE BEAM FLANGE WIDTH AND
THICKNESS INTO CONSIDERATION.

APPLIES TO GEARED UNITS ONLY...FOR PLAIN UNITS
"L" IS THE SAME ON BOTH SIDES OF UNIT.

FLAT TREAD WHEELS SUPPLIED FOR FLAT FLANGE BEAMS

THIS UNIT IS ADJUSTABLE FROM 4" - 7 1/8" FLANGE WIDTH

FLAT OR TAPER FLANGE MUST BE SPECIFIED AT TIME OF ORDER

R1	CONFIG. CHG. CAP CHG. RLB	11/18/02
MK.	REVISIONS	CK-DATE

3 TON ARMY TYPE PLAIN AND
GEARED TROLLEY HOIST

CHESTER HOIST
LISBON, OHIO

DR. RLB	TR.	CK.	AP.
SCALE NONE		DATE 11/18/02	
REF. DWG. NO. 3ZATNEW			
Dwg. No. CD043			